

SONARRAY BY SONANCE SR1 SYSTEM WITH SR 2-125 AMPLIFIER



The SR 2-125 Amplifier is purpose built to be the ideal companion for the SONARRAY SR1 satellite and subwoofer system. The SR 2-125 is a 125-watt stereo amplifier with DSP presets easily accessed through dials on the back of the amplifier. Whether the outdoor installation is hardscape or softscape, the amplifier presets optimize the best sound and performance of the SR1 system for any outdoor environment.

The amplifier includes digital coax, toslink and analog inputs to accommodate all types of sources and streaming devices. Each input has a loop output allowing for the simple connection of multiple SR 2-125 amplifiers to power multiple SR1 landscape audio systems. The SR 2-125 can be rack mounted with the included rack ears or surface mounted with included feet.



\$800

SONARRAY SR 2-125 Amplifier

- 20 DSP presets
- 2 Channel (1 stereo pair)
- 125 Watts per channel @ 8 ohms
- Coax, Toslink and RCA Inputs/Outputs
- Rack ears and feet included

SKU# 93135



\$2,500

SONARRAY SR1 System

- 8 Satellite Speakers + 1 In-Ground Subwoofer
- 8 Ohm impedance matched system
- Perfectly even coverage up to 2,000 square feet*

SKU# 92983

*Depending on property layout




\$2,999

SONARRAY SR1 System with SR 2-125 Amplifier

- 1 SR 2-125 Amplifier
- 8 Satellite Speakers + 1 In-Ground Subwoofer

SKU# 93134

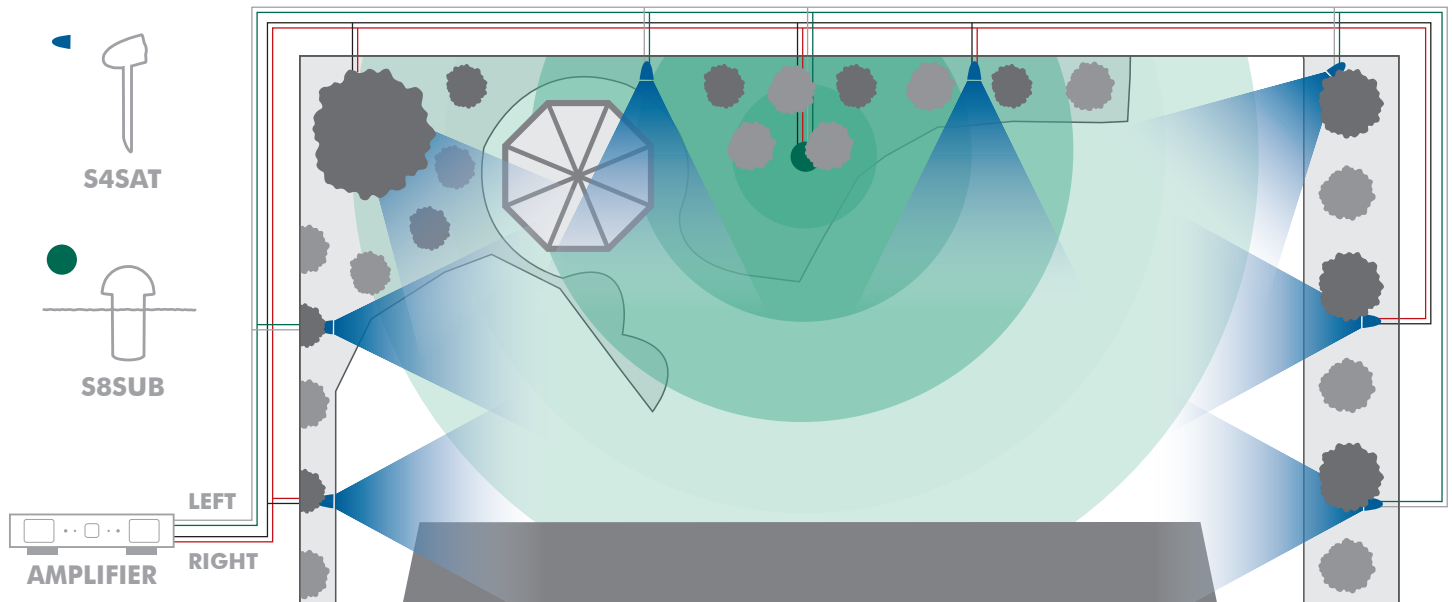

SONARRAY SR 2-125 Amplifier Specifications

| | | | |
|-----------------------------------|--|--|---|
| Number of Channels: | 2 (1 stereo pair) | Loop Output Impedance: | 600 ohms |
| Power Output - 8 ohms: | 125 Watts RMS per channel (both channels driven) | Maximum Analog Input Voltage: | 2.9V VAC RMS |
| Power Output - 4 ohms: | 200 Watts RMS per channel (both channels driven) | Operating Voltage: | 100-120V@60Hz, 220-240V@50Hz |
| Frequency Response: | 5Hz - 50kHz, bandwidth limited | AC Fuse: | 5A (T5AL ~ 250V) |
| Total Harmonic Distortion: | 0.07% (1kHz, 8 ohms) 0.06% (1kHz, 4 ohms) | Rack Space Requirement: | 1U – 1/2 Rack Width |
| Signal to Noise Ratio: | -100dB (20Hz-20kHz) | Dimensions w/ Feet (W x H x D): | 8 5/8" x 2 1/8" x 16 13/16" (219mm x 54mm x 427mm) |
| Input Gain: | 29dB | Dimensions w/ Rack Ears w/o Feet (W x H x D): | 19" x 1 3/4" x 16 13/16" (482mm x 44mm x 427mm) |
| Input Sensitivity: | 100mV for 1 Watt Output @ 8 ohms 1110mV for 125 Watts Output @ 8 ohms | Shipping Weight: | 11 lbs (5.0kg) |
| Input Impedance: | 20k ohms | | |

SONARRAY
BY SONANCE

991 Calle Amanecer | San Clemente, CA 92673 USA
(949) 492-7777 | www.sonance.com/outdoor/sonarray

SONARRAY is a licensed registered trademark of Ambisonic Systems LLC, Sonance is a trademark of Dana Innovations, registered in the U.S. and other countries. Copyright 2016, all rights reserved. Patent pending. Due to continuous product improvement, all features and specifications are subject to change without notice.